



COMPRESSORS

New Warrior

HIGH PRESSURE • CYLINDER • AUTO • TANK

• POWER COMPRESSORS •

KILLERBRANDS.CO.ZA

A Powerful *Luxury* Compressor

43COM2CYIW

Luxury Double Cylinder High Pressure Air Compressor. Auto-Stop
4500 PSI / 30MPA



The Double-Cylinder Compressor is a powerful workhorse, designed for filling large tanks efficiently. It features dual cooling—fan and water-cooled—for optimal performance and reliability during extended use.


Specification	Details
Power	2200W
Power Supply	220V-240V / 50Hz
Compression Mode	Two-Stage Compression
Cooling Method	Fan Cooling & Water Cooling
Temperature Protection	≤ 95°C
Weight	35 kg
Max Pressure	30 MPA / 300 Bar / 4500 PSI
Dimensions (L×W×H)	39.5 × 40 × 45 cm

Special Features	Luxury model, Double Cylinder, Auto-stop
Ideal Use	High-pressure filling of large tanks
Cooling Type	Combined: Fan + Water

A mini Compressor 4500Psi / 300 Bar

43COM980-8

Auto Shutdown *Mini* Compressor

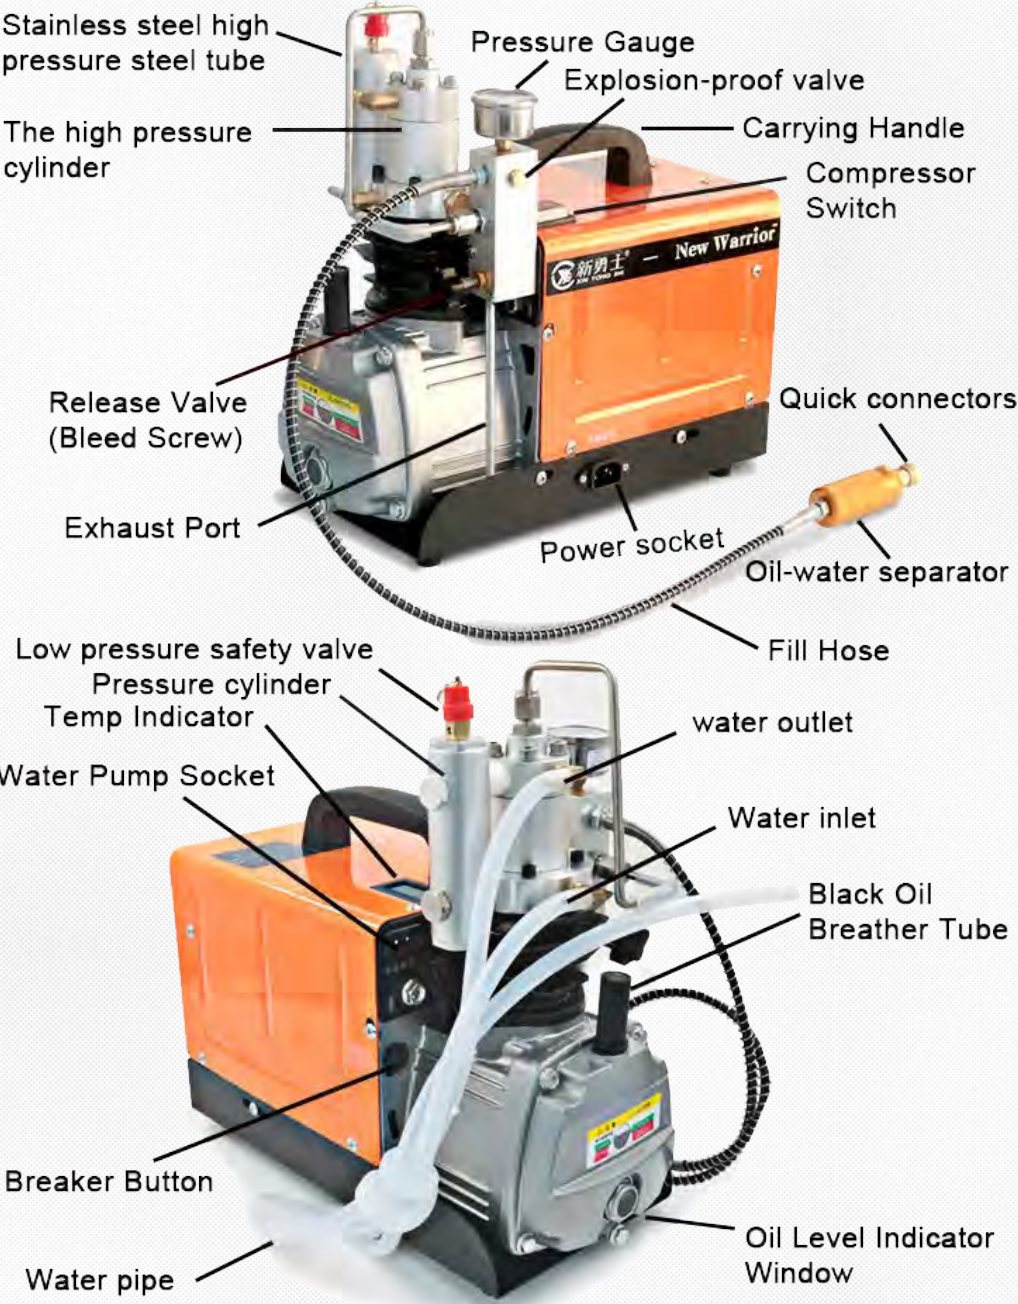

Specification	Details
Weight	18.5 kg
Cooling Method	Water Cooled
Compression Mode	2-Stage Compression
Power	1600W

Inflation Pressure	300PA / 300Bar
Power Supply	220V/50HZ : 110V/60HZ
Max Pressure	30 MPA / 300 Bar / 4500 PSI
Dimensions (L×W×H)	39.5 × 40 × 45 cm


NEW WARRIOR™

A Light Weight Compressor



CAN BE USED
DIRECTLY
WITH 220V

43COM2AS




The 12V Mini High-Pressure Compressor is a compact and portable air solution designed with the latest technology. It is ideal for on-the-go use and supports automobile battery operation (12V), as well as 220V (normal-plug-adaptor)

- » Lightweight and fast-inflating
- » Oil-free design for maintenance-free operation
- » Low noise and cool running temperature ensure comfort and safety during use

Specification	Details
Power	350W
Power Supply	12V (Automobile Power or Car Battery) and 220V
Compression Mode	3-Stage Compression

43PUMHF

Hand Powered Air Pump

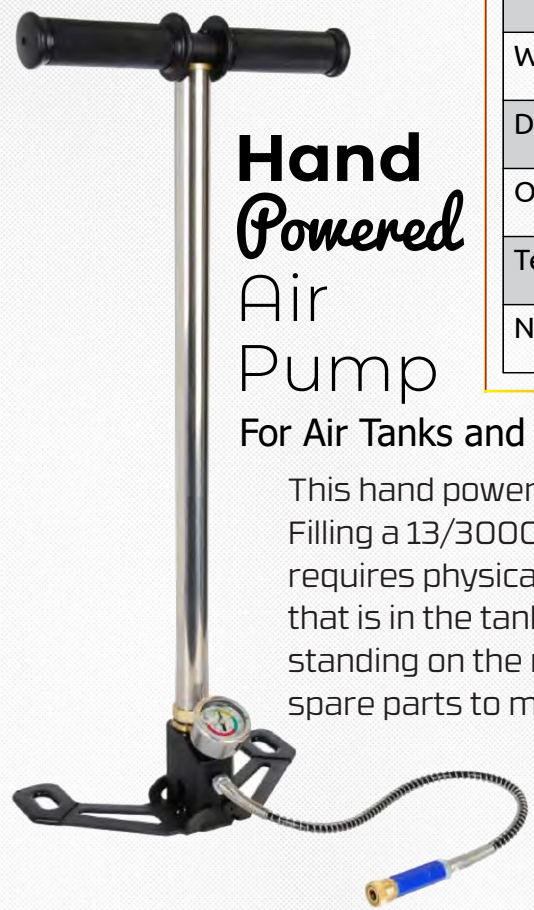

Cooling Method	Fan Air Cooled
Inflation Pressure	300 Bar / 4500 PSI
Charging Rate	0–300 Bar / 4500 PSI in 20 min (0.45L Tank)
Weight	8.3 kg
Dimensions (L×W×H)	32 × 15 × 31 cm
Oil Requirement	Oil-Free Operation
Temperature	Low-temperature operation
Noise Level	Low noise

For Air Tanks and PCP Rifles

This hand powered pump is capable of filling PCP air rifles and 3000 PSI air tanks. Filling a 13/3000 air tank takes on average 15 minutes. This hand powered pump requires physical effort to fill your tank and it will get more difficult the more psi that is in the tank. The large handle makes it easy to pump while standing on the metal feet at the base of the unit. Comes with spare parts to maintain your pump.



NEW WARRIOR™ Tank



43TANK61

0.45L High-Pressure Air Tank - 300 Bar

Specification	Details
Capacity	0.45 Litres
Working Pressure	300 Bar / 4500 PSI
Diameter	61 mm
Length	186 mm
Thread Size	M18 × 1.5
Standard	International (300 Bar)

0.45L

MAXTACT® Tank



66TB107MT

CO2 Gas Cylinder
MT 7.0oz

- » Length: 23cm
- » Circumference: 5cm



Tank

Plus Pin Valve



SKU	SIZE
66TBI20	20oz
66TBI16	16oz
66TBI12	12oz
66TBI09	9oz

66FSMTRH



FILLING STATION
MT REMOTE
HOSE FOR CAA
LENGTH: 77CM

43HOSE



HOSE & CONVERTER
LENGTH: 50CM 2.8MM
FEMALE FAST CONNECTOR
Hose Terminal threads male M10 * 1.0

43FC40X60



PIECES
6



SMALL COTTON FILTERS
MATERIAL: COTTON

66TBITAP



ON/OFF VALVE

66TBIPIN



PIN VALVE

66KMARMTCA

CONSTANT
AIR ADAPTOR
Cylinder M.T.

Length: 11.5cm



PCP PROBES



PROBE



60RAM30NIP4.5 4.5
60RAM30NIP5.5 5.5
◎ M30



60RAM15NIP4.5 4.5
60RAM15NIP5.5 5.5
◎ M15 PCP BULLPUP
60RAPR900WNIPSS
◎ PR900W +2x O-Ring Stainless Steel



60RAM16NIP4.5 4.5
60RAM16NIP5.5 5.5
◎ M11/M22/M25

PCP ADAPTOR

60AM



Male Adaptor
Compressor



60RAPR9000WNIP
ARTEMIS ADAPTOR
for PR900W